

Rod guide



Description



The guide holds the drive rod in place and prevents its deformation during normal use of the shutters.

Application

Install the guides at approximate intervals of 400 mm along the length of the rod. The guides should be suitably distributed between the espagnolette and the upper and lower closing hooks.

Mounting

Use two 4x30 mm screws with thread suitable for the shutter material.

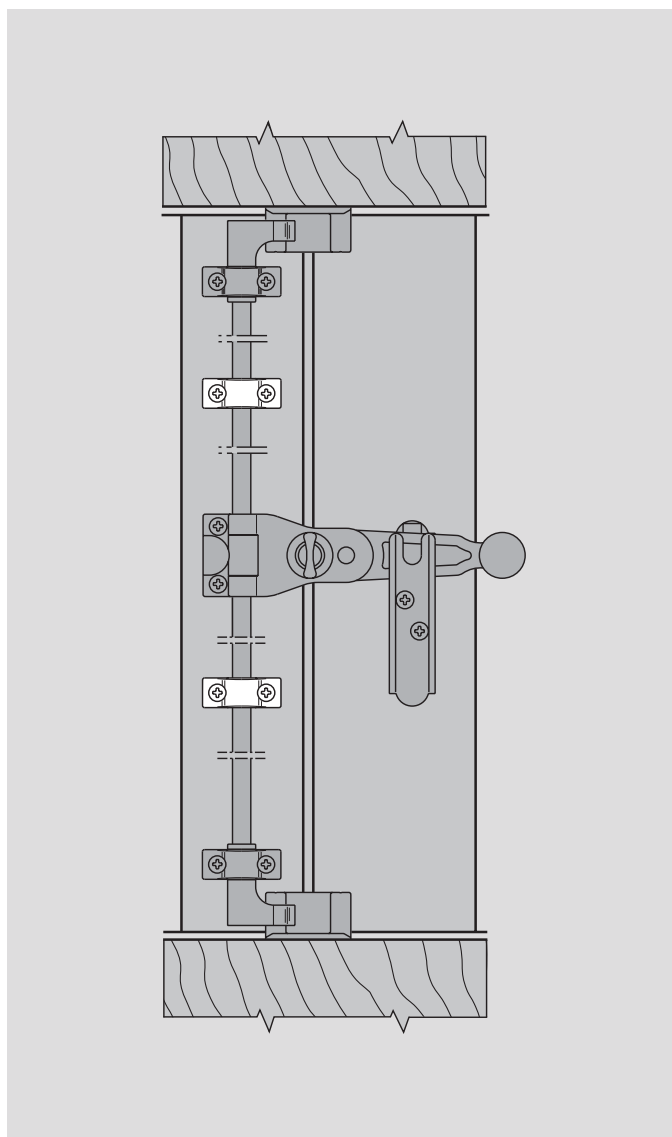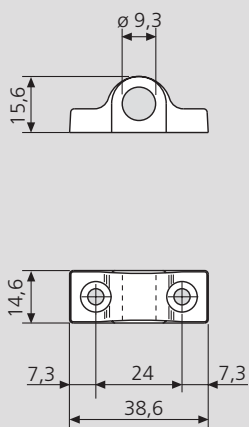

Order specifications

Black finish

Code
H00901.15.93

Bichromated finish

Code
H00901.15.04