


Reinforcement corner bracket

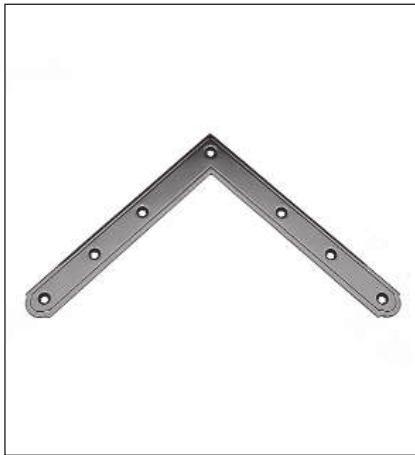

Description

Shaped pressed steel corner bracket, 220x220 mm long and 3 mm thick. The special shape of the inner face of the bracket ensures excellent attachment to the shutter. Two-handed version.



Application

For all shutters where you wish to increase the resistance of the corner joints on the side opposite the hinges. Suitable for shutters with a width of over 1000 mm, and for those with load-bearing perimetrical rails and stiles, where system steadiness is not guaranteed by hinges anchored to the side stile only. It can also be mounted, for aesthetic purposes, on stationary shutters

when corner brackets are installed on the swinging shutters.

Mounting

Use seven 4.5x30 mm screws with thread suitable for the shutter material.

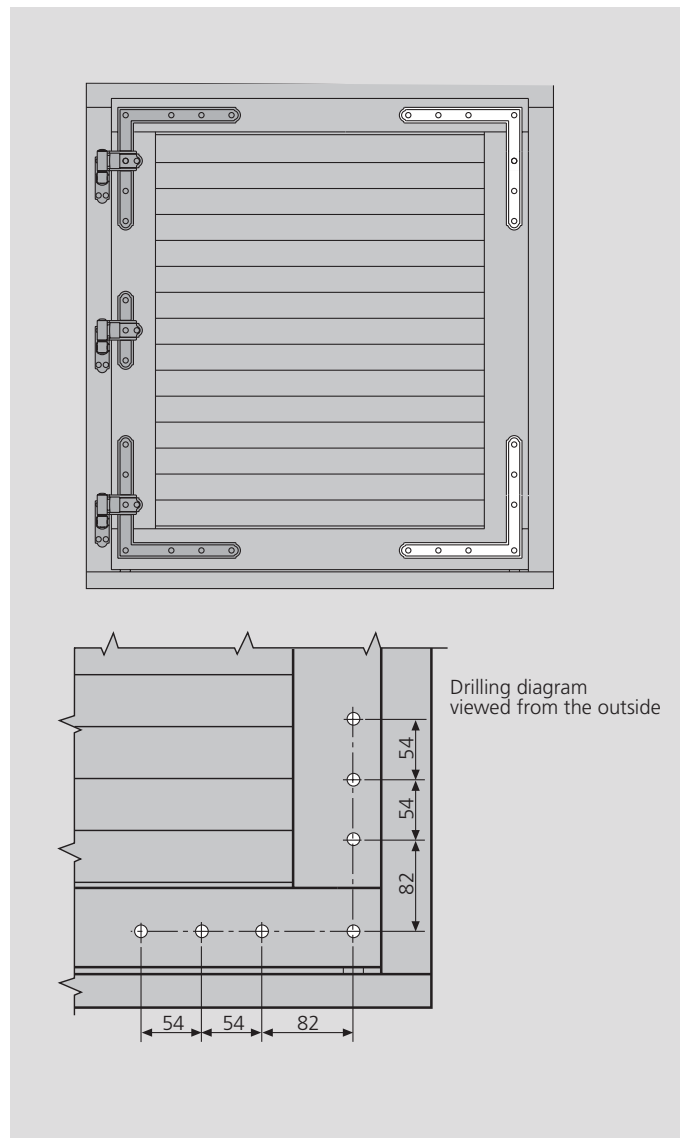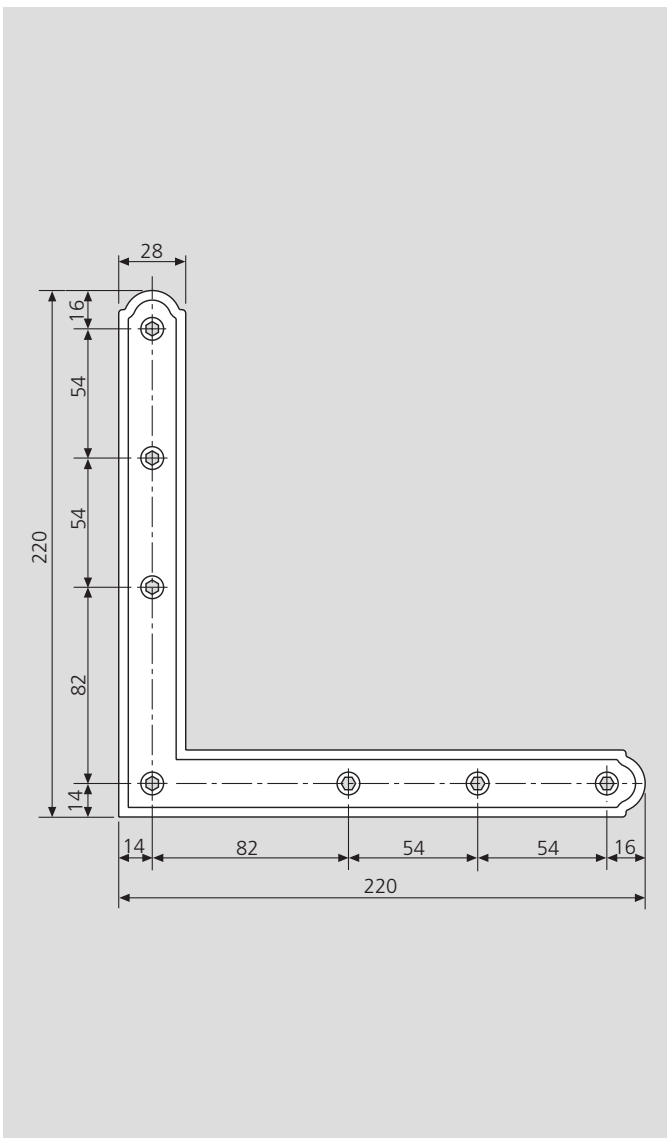

Order specifications

Black finish

Code
H00919.00.93

Bichromated finish

Code
H00919.00.04