

Fixed pintle for masonry



Description

Cold-pressed steel pintle with fixed 9x30 mm pivot. M12 threaded shank available in four different lengths, from 85 to 175 mm, depending on the GR size.

Application

For shutters hinged directly to the wall. Used in combination with Abaco hinges with 19 or 45 mm axis, either fixed or with horizontal adjustment. The length of the shank must be selected based on the drilling angle (30° or 90°), the shutter design (if folding shutters are used) and the composition of the wall.

Mounting



Use a 16 mm diameter anchor or chemical mortar. For proper drilling of the wall use jig art. H00930.05.01 (with fixed or adjustable hinges) or jigs H01149 (with adjustable hinges only).

NB. The moulding to cover the pintle hole, art. H00917.02.93, must be ordered separately.

Accessories



Nylon screw anchor for pintle installation
 Art. H00901.47.01 (100 mm length)
 Art. H00901.48.01 (135 mm length)

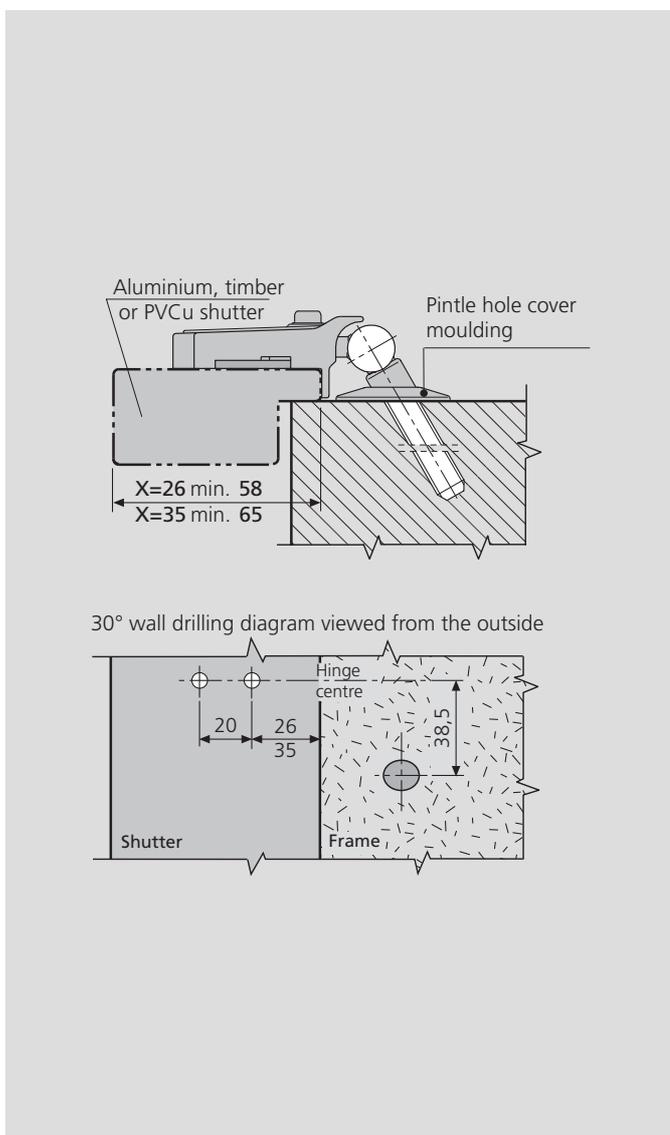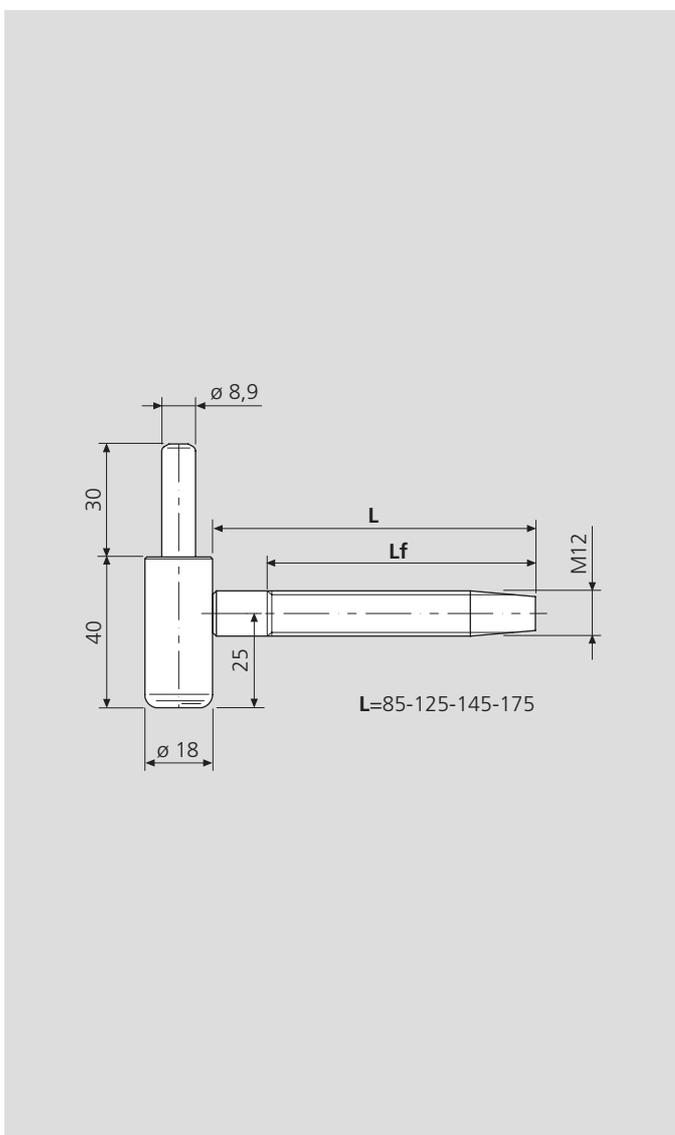

Order specifications

GR	L	Lf (Thread lenght)	Black finish		Bichromated finish	
			Code	Code	Code	Code
1	85	70	H00928.01.93		H00928.01.04	
2	125	80	H00928.02.93		H00928.02.04	
3	145	80	H00928.03.93		H00928.03.04	
4	175	80	H00928.04.93		H00928.04.04	