# Pintle with 24 mm plate and vertical adjustment



### Description

Cold-pressed steel pintle welded to a shaped steel plate whose width varies according to the GR size. Stainless steel screw for height adjustment.

### Application


For narrow reveals or frames that are flush with the exterior wall.


The GR size depends on the F thickness of the rebate.

• Used in combination with fixed hinges to be chosen based on the shutter design.


#### Mounting

Use three 4.5x35 mm screws with thread suitable for the shutter material.

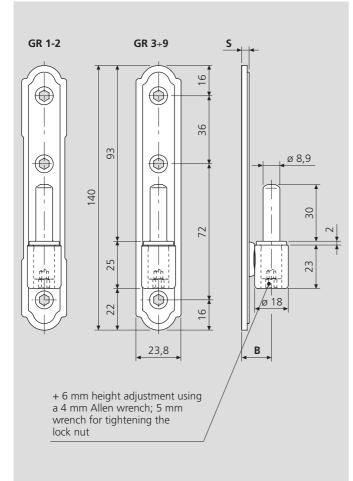



Drilling diagram viewed from the outside



## **Order specifications**

Order specifications					
			Black finish	Bichromated finish	
GR	В	S	Code	Code	
1	12	2,7	H02924.12.93	H02924.12.04	
2	15	4	H02924.15.93	H02924.15.04	
3	18	4	H02924.18.93	H02924.18.04	
4	20	4	H02924.20.93	H02924.20.04	
5	22	4	H02924.22.93	H02924.22.04	
6	24	4	H02924.24.93	H02924.24.04	
7	26	4	H02924.26.93	H02924.26.04	
8	28	4	H02924.28.93	H02924.28.04	
9	30	4	H02924.30.93	H02924.30.04	

